AERTECNICA think clean

NEW!!

KOMPATTA KT

WITHOUT SELFCLEANING

DESCRIPTION: KOMPATTA KT

CODE	DESCRIPTION
CIKT20M	KOMPATTA central vacuum KT20M 2,6Kw 230V Single-phase
CIKT10	KOMPATTA central vacuum KT10 2,2Kw 380V Three-phase
CIKT20	KOMPATTA central vacuum KT20 2,6Kw 380V Three-phase
CIKT30	KOMPATTA central vacuum KT30 4,6Kw 380V Three-phase

Via Cerchia di S. Egidio, 760 | 47023 Cesena (FC) Italy | Tel. +39 0547 637311 | Fax +39 0547 631388 *info@aertecnica.it* www.aertecnica.it
Capitale Sociale €191.360,00 i.v. | Registro Imprese 02136390404 | C.C.I.A.A. N° 243594 Forlì-Cesena | Cod. Fisc. / P.IVA 02136390404

TUBO
Il sistema aspirapolvere evoluto.

AERTECNICA think clean

NEW!!

KOMPATTA KT

WITH SELFCLEANING

DESCRIPTION: KOMPATTA KT with Self-cleaning

CODICE	DESCRIZIONE
CIKT20MA	KOMPATTA central vacuum KT20MA 2,6Kw 230V Single-phase with Self-cleaning
CIKT10A	KOMPATTA central vacuum KT10A 2,2Kw 380V Three-phase with Self-cleaning
CIKT20A	KOMPATTA central vacuum KT20A 2,6Kw 380V Three-phase with Self-cleaning
CIKT30A	KOMPATTA central vacuum KT30A 4,6Kw 380V Three-phase with Self-cleaning

Via Cerchia di S. Egidio, 760 | 47023 Cesena (FC) Italy | Tel. +39 0547 637311 | Fax +39 0547 631388 *info@aertecnica.it* www.aertecnica.it
Capitale Sociale €191.360,00 i.v. | Registro Imprese 02136390404 | C.C.I.A.A. N° 243594 Forlì-Cesena | Cod. Fisc. / P.IVA 02136390404

TUBÒ
Il sistema aspirapolvere evoluto.

KOMPATTA KT

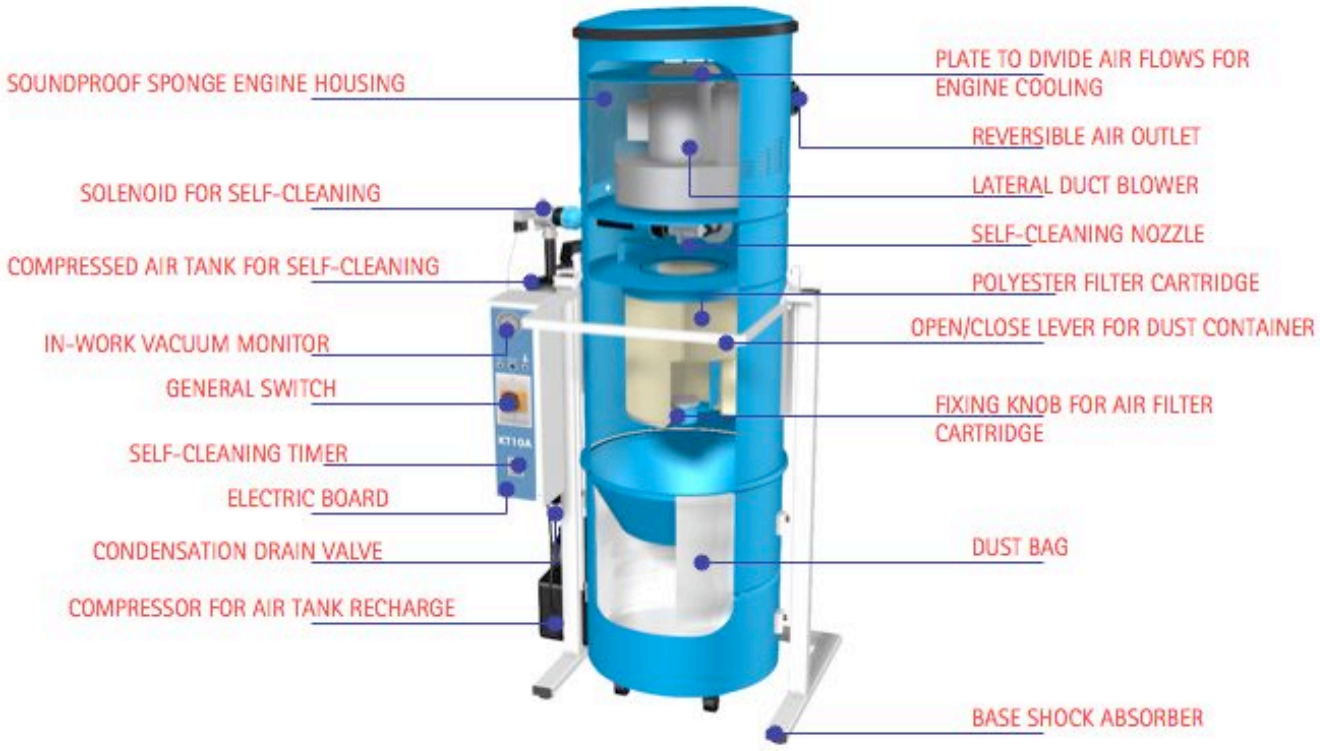

Via Cerchia di S. Egidio, 760 | 47023 Cesena (FC) Italy | Tel. +39 0547 637311 | Fax +39 0547 631388 *info@aertecnica.it* *www.aertecnica.it*
Capitale Sociale €191.360,00 i.v. | Registro Imprese 02136390404 | C.C.I.A.A. N° 243594 Forlì-Cesena | Cod. Fisc. / P.IVA 02136390404

TUBÒ
Il sistema aspirapolvere evoluto.

AERTECNICA think clean

TECHNICAL DATA

KOMPATTA KT	Cod.	CIKT10	CIKT10A	CIKT20M	CIKT20MA	CIKT20	CIKT20A	CIKT30	CIKT30A
	MODEL	KT10	KT10A	KT20M	KT20MA	KT20	KT20A	KT30	KT30A
TECHNICAL FEATURES									
Simultaneous operators	n.	1	1	2	2	2	2	3	3
Self-cleaning system		NO	SI	NO	SI	NO	SI	NO	SI
Power supply	Volt	380	380	230	230	380	380	380	380
Motor power	kW	2,2	2,2	2,6	2,6	2,6	2,6	4,6	4,6
Absortion during work	A	7	7	11	11	6,5	6,5	9	9
Frequency	Hz	50	50	50-60	50-60	50-60	50-60	50-60	50-60
Motor revolutions	rpm	2.900	2.900	3.500	3.500	3.500	3.500	3.500	3.500
Power to sockets	Volt	12	12	12	12	12	12	12	12
Max air flow	mc/h	300	300	360	360	360	360	650	650
Air flow during work	mc/h	200	200	275	275	275	275	560	560
Max depression	mm H2O	4.000	4.000	4.000	4.000	4.000	4.000	4.500	4.500
Air inlet / outlet diameter	mm	80	80	80	80	80	80	80	80
Height	cm	196	196	196	196	196	196	196	196
Width	cm	92	92	92	92	92	92	92	92
Depth	cm	76	76	76	76	76	76	76	76
Diameter	cm	56	56	56	56	56	56	56	56
Weight	kg	132	150	132	150	132	150	152	170
Height air flow	mm	1.665	1.665	1.665	1.665	1665	1665	1.665	1.665
Height dust entry	mm	840	840	840	840	840	840	840	840
Filtering surface	mq	5	5	5	5	5	5	5	5
Filter cartridge material		poliestere	poliestere	poliestere	poliestere	poliestere	poliestere	poliestere	poliestere
Dust canister capacity	litri	150	150	150	150	150	150	150	150
Noise level	dB (A)	<70	<70	<70	<70	<70	<70	<70	<70

The new three-phase line Kompatta, indicated by “KT”, was created to satisfy the requirements of tertiary/professional sector. Meeting all the Aertecnica standards, the new KT line was built with the “plug & play” concept, in order to offer to our fitter a guarantee of absolute reliability, and above all the top swiftness of installation, dramatically speeding up the product setup and reducing the size.

The new three-phase Kompatta is built in a single structure, divided into three sections:

- Upper section: engine housing
- Central section: air filter
- Lower section: cyclone and dust collector

Kompatta KT line was projected to offer maximum versatility and to meet the needs of a market more and more evolved and demanding. Main features of this product can be summarized as follows:

- Line is composed by 8 models
- From one to three simultaneous operators
- Air filter
- Air filter, with self-cleaning system
- Mechanic depression regulation
- Electric depression regulation
- Electric board integrated in the machine frame
- Compensation valve integrated and soundproofed

The project takes great care to guarantee the top quietness during operation. The usage of composite materials and shock-absorbing polyurethanes offered a result of acoustic pressure, with an efficiency level clearly higher than the average.

The air filter, built in washable polyester, has a filtering area of about 5 sq. metres; moreover the self-cleaning system ensures a higher efficiency level, allowing the machine to constantly work with a perfectly clean filter, reducing the losses of load due to a dirty filter. The dust collector has a capacity of 150 litres; that means long life and reduction of maintenance and readjustment interventions.

This Kompatta KT new line was thought for our fitter!

PLUG & PLAY technology allows to reduce to a minimum the time to connect the unit. In fact the monobloc structure doesn't require any additional connection, including the electrical ones that are made up of rapid connectors and terminal boards as standard equipment.

Ufficio Marketing
AERTECNICA SpA